




- Application: natural ventilation
- Internal intelligent cut-off switch S12
- Parallel connection up to 8 drives in one group
- Z-Version: Programmable feedback limit position „OPEN“ and „CLOSE“ (max. 24 V, 500 mA)

Options

- Programmable synchronised run (max. 4 drives) and special functions

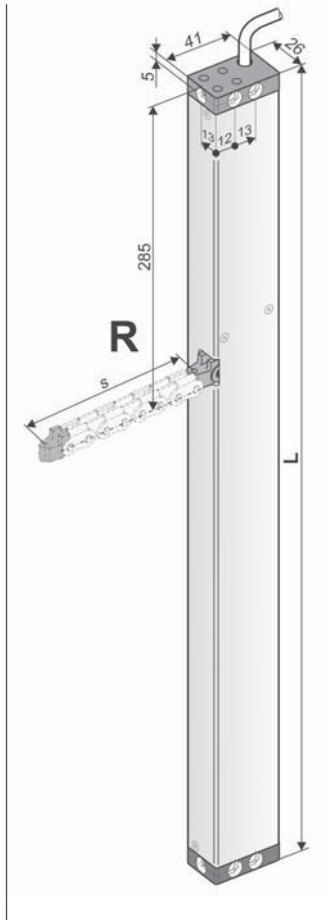

TECHNICAL DATA

U_N Rated voltage 230V AC (50 Hz)

I_N Rated current 0,13 A

I_A Cut-off current 0,2 A

P_N Rated power 30 W


ED Duty cycle 30 % (ON: 3 min/OFF: 7 min.)

Protection rating IP 32

Ambient temperature range -5 °C ... +60 °C

F_Z Pulling force max. 250 N

F_A Pushing force

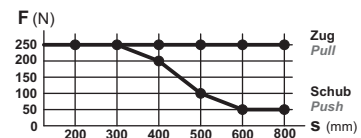

s > 600 mm only for pulling application

F_H Pullout force 1.800 N (fastening depended)

Chain Stainless steel

Connecting cable non-halogen, grey 6 x 0,75 mm², ~ 3 m

v Speed 8,0 mm/s 8,0 mm/s

s Stroke 200 – 800 mm (± 5 %)

L Length see order data

ORDER DATA						
s [mm]	L [mm]	Version	Finish	PU/pcs.	Part.-No.	
200	475	KS2 200 S12 230V R	E6/C-0	1	494020	
			RAL 9016	1	1001494020	
		KS2 200 S12 230V R Z	E6/C-0	1	494023	
			RAL 9016	1	1001494023	
300	520	KS2 300 S12 230V R	E6/C-0	1	494030	
			RAL 9016	1	1001494030	
		KS2 300 S12 230V R Z	E6/C-0	1	494033	
			RAL 9016	1	1001494033	
400	570	KS2 400 S12 230V R	E6/C-0	1	494040	
			RAL 9016	1	1001494040	
		KS2 400 S12 230V R Z	E6/C-0	1	494043	
			RAL 9016	1	1001494043	
500	685	KS2 500 S12 230V R	E6/C-0	1	494050	
			RAL 9016	1	1001494050	
		KS2 500 S12 230V R Z	E6/C-0	1	494053	
			RAL 9016	1	1001494053	
600	685	KS2 600 S12 230V R	E6/C-0	1	494060	
			RAL 9016	1	1001494060	
		KS2 600 S12 230V R Z	E6/C-0	1	494063	
			RAL 9016	1	1001494063	
800	765	KS2 800 S12 230V R	E6/C-0	1	494080	
			RAL 9016	1	1001494080	
		KS2 800 S12 230V R Z	E6/C-0	1	494083	
			RAL 9016	1	1001494083	

OPTIONS			
Special model	PU/pcs.	Part.-No.	
Drive housing painted/powder coated in other RAL colours			
Specify at order stage:	1 – 4	516004	
	5 – 9	516004	
	10 – 49	516004	
	50 – 99	516004	
	up 100	516004	
Extra length connecting cable:			
5 m – non-halogen, grey – 6 x 0,75 mm ²		501164	
10 m – non-halogen, grey – 6 x 0,75 mm ²		501166	
Microprocessor programming S12			
Synchronised multi-drive set functions		495588	
Electronic stroke reduction		495590	
Special functions		524180	